




# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## 90 DEGREE FEMALE THREAD ELBOW

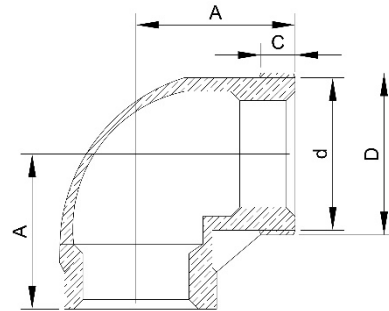

### DIMENSION TABLE

SIZE(INCH)	D(MM)	d(MM)	C(MM)	A(MM)
1/8"	13.9	12.2	5.5	17
1/4"	16.9	14.9	6	19
3/8"	20.2	18.4	6	23
1/2"	26.9	24.9	6	27
3/4"	31.9	29.9	7	31.5
1"	39.9	37.9	8	36.5
1-1/4"	48.9	46.4	9	42.5
1-1/2"	55.4	52.9	10	47.5
2"	67.4	64.9	11	56
2-1/2"	84.5	82	13	68
3"	98.5	95.5	15	77.5

### FEATURE


- MODEL NO.: HY-CFTE90
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## FEMALE THREAD TEE

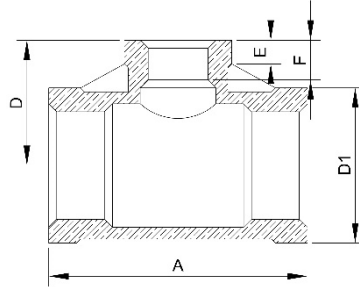

### DIMENSION TABLE

SIZE	D(INCH)	d(MM)	C(MM)	A(MM)
1/8"	13.9	12.2	5.5	17
1/4"	16.9	14.9	6	19
3/8"	20.2	18.4	6	23
1/2"	26.9	24.9	6	27
3/4"	31.9	29.9	7	31.5
1"	39.9	37.9	8	36.5
1-1/4"	48.9	46.4	9	42.5
1-1/2"	55.4	52.9	10	47.5
2"	67.4	64.9	11	56
2-1/2"	84.5	82	13	68
3"	98.5	95.5	15	77.5

### FEATURE



- MODEL NO.: HY-CFTT
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou  
 City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
 Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## HEX NIPPLE

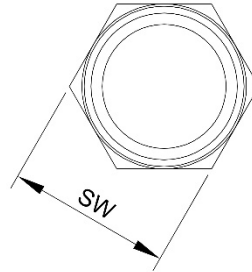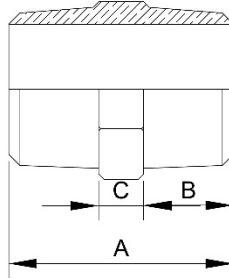

## DIMENSION TABLE

SIZE(INCH)	A(MM)	B(MM)	C(MM)	SW(MM)	SIDE NO.
1/8"	28	11	6	13	6
1/4"	32	13	6	15	6
3/8"	37	15	7	19	6
1/2"	42	17	8	23	6
3/4"	45	18	9	29	6
1"	49	19	11	36	6
1-1/4"	54	21	12	45	6
1-1/2"	56	22	12	51	6
2"	65	26	13	63	6
2-1/2"	76	31	14	78	6
3"	80	33	14	92	6
4"	86	36	14	117	6

## FEATURE


- MODEL NO.: HY-CHN
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
 Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## FEMALE THREAD COUPLING

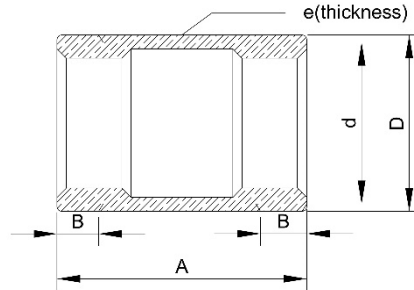

### DIMENSION TABLE

SIZE(INCH)	D(MM)	D(MM)	B(MM)	e(MM)	A(MM)
1/8"	13.9	12.2	5.5	2.5	25
1/4"	16.9	14.9	6	2.5	25
3/8"	20.2	18.4	6	2.5	30
1/2"	26.9	24.9	6	3	35
3/4"	31.9	29.9	7	3	39
1"	39.9	37.9	8	3	44
1-1/4"	48.9	46.4	9	3.5	50
1-1/2"	55.4	52.9	10	3.5	54
2"	67.4	64.9	11	4	63
2-1/2"	84.5	82	14	4	71.5
3"	98.5	95.5	15	4.5	77
4"	124	121	17	5	86

### FEATURE


- MODEL NO.: HY-CFC
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## FEMALE THREAD UNION

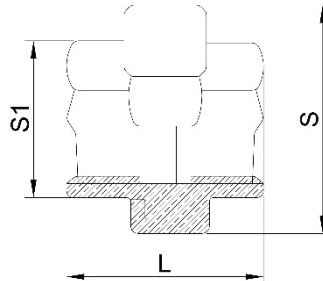

### DIMENSION TABLE

SIZE(INCH)	L(MM)	S(MM)	S1(MM)
1/4"	31	29*8	17*8
3/8"	34	34*8	21*8
1/2"	38	34*8	24*8
3/4"	43	47*8	31*8
1"	49	53*8	38*8
1-1/4"	51	64*8	47*8
1-1/2"	54	70*8	53*8
2"	61	87.5*8	65*8
2-1/2"	69.5	107*10	81*10
3"	82	120*10	94*10
4"	98	147*10	120*10

### FEATURE


- MODEL NO.: HY-CFTU
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING
- SEALING FACE: PTFE GASKET, COPPER GASKET



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## FEMALE THREAD CROSS

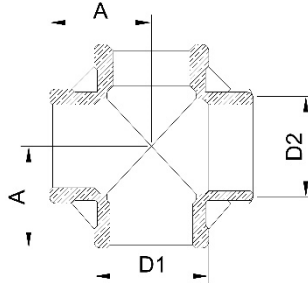

## DIMENSION TABLE

SIZE(INCH)	D1(MM)	D2(MM)	E(MM)	A(MM)
1/8"	13.9	12.2	2.5	17
1/4"	16.9	14.9	2.5	19
3/8"	20.2	18.4	2.5	23
1/2"	26.9	24.9	3	27
3/4"	31.9	29.9	3	31.5
1"	39.9	37.9	3	36.5
1-1/4"	48.9	46.4	3.5	42.5
1-1/2"	55.4	52.9	3.5	47.5
2"	67.4	64.9	4	56

## FEATURE


- MODEL NO.: HY-CFTCR
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## 90 DEGREE MALE FEMALE THREAD ELBOW

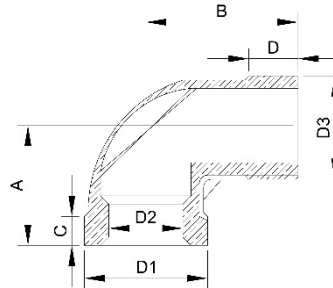

### DIMENSION TABLE

SIZE(INCH)	D1(MM)	D2(MM)	D3(MM)	A(MM)	B(MM)	C(MM)	D(MM)
1/8"	13.9	8	10.2	17	24	5.5	7
1/4"	16.9	10.7	13.5	20	28	6.5	10
3/8"	20.2	14.2	17.2	23	32	7	10
1/2"	26.9	17.8	21	28	37	7	13
3/4"	31.9	22.8	26.6	32	43	8	15
1"	39.9	28.7	33.6	38	52	10	17
1-1/4"	48.9	37.3	42.4	43	59	11	19
1-1/2"	55.4	43.8	48.4	48	64	12	19
2"	67.4	55.3	60.3	57	74	13	24

### FEATURE


- MODEL NO.: HY-CMFTE90
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou  
City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## 45 DEGREE FEMALE THREAD ELBOW

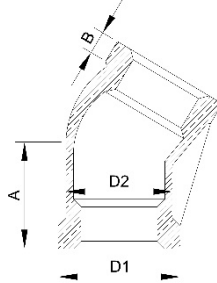

### DIMENSION TABLE

SIZE(INCH)	D1(MM)	D2(MM)	A(MM)	B(MM)
1/2"	26.9	24.9	21	3
3/4"	31.9	29.9	25	7
1"	39.9	37.9	29	8
1-1/4"	48.9	46.4	33	9
1-1/2"	55.4	52.9	37	10
2"	67.4	64.9	42	11

### FEATURE

- MODEL NO.: HY-CFTE45
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING








# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## MALE THREAD HOSE NIPPLE

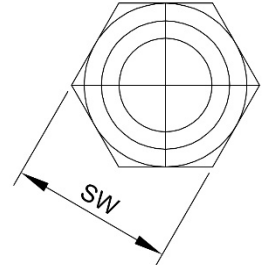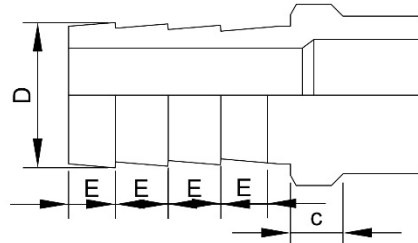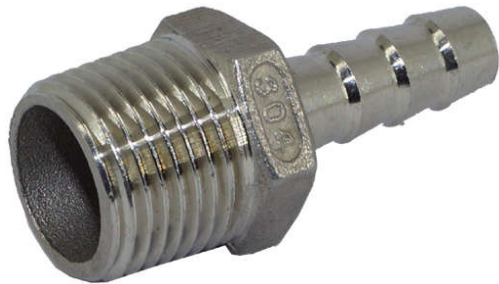

### DIMENSION TABLE

SIZE(INCH)	D(MM)	A(MM)	C(MM)	E(MM)	SW	SIDE NO.
1/8"	8	38	6	5	12	6
1/4"	8	42	6	5	15	6
3/8"	10	48	7	5.5	19	6
1/2"	14	60	8	8	23	6
3/4"	19	65	9	9	29	6
1"	26	75	11	10	36	8
1-1/4"	32	84.5	12	12	45	8
1-1/2"	38	90	12	13	51	8
2"	51	99	13	14	63	8
2-1/2"	63	106	12	15	78	8
3"	76	114	12	16	92	8
4"	102	124	14	17	118	8

### FEATURE



- MODEL NO.: HY-CMTHC
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## FEMALE THREAD HEX CAP

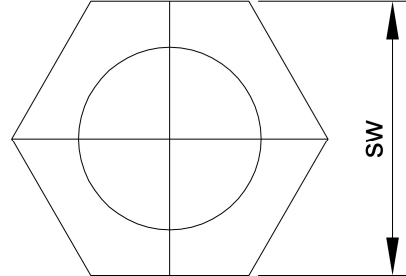

## DIMENSION TABLE

SIZE(INCH)	A(MM)	C(MM)	SW(MM)	SIDE NO.
1/8"	15		12.8	6
1/4"	15		15.5	6
3/8"	16		19	6
1/2"	20	9.5	26.5	6
3/4"	22	11.5	31.5	8
1"	26	14	38.5	8
1-1/4"	28	15	47.5	8
1-1/2"	32	17	54	8
2"	34	17	66	8
4"	44	25	121.5	8

## FEATURE


- MODEL NO.: HY-CHFTC
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## FEMALE THREAD ROUND CAP

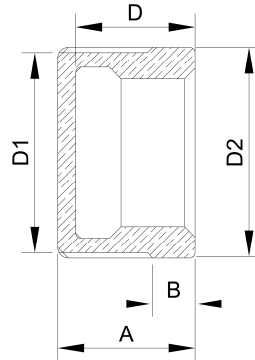

### DIMENSION TABLE

SIZE(INCH)	D1(MM)	D2(MM)	A(MM)	B(MM)	D(MM)
1/8"	12.2	13.9	15	5.5	12.6
1/4"	14.9	16.9	15	6	12.6
3/8"	18.4	20.2	16	6	13.6
1/2"	24.9	26.9	20	6	17.5
3/4"	29.9	31.9	22	7	19.5
1"	37.9	39.9	26	8	23.5
1-1/4"	46.4	48.9	28	9	25
1-1/2"	52.9	55.4	30	10	26.5
2"	64.9	67.4	34	11	30.5
2-1/2"	80	84	39	13	35.5
3"	94.5	98	42	15	38

### FEATURE


- MODEL NO.: HY-CFTC
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## SQUARE HEAD PLUG

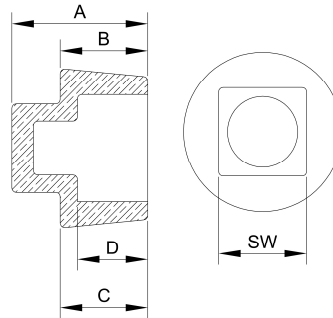

## DIMENSION TABLE

SIZE(INCH)	A(MM)	B(MM)	C(MM)	D(MM)	SW(MM)
1/8"	13	6.5	10.5	4.5	6
1/4"	17.5	11	15	8.7	8
3/8"	17.5	11	15	8.7	10
1/2"	21	13	18.5	10.7	12
3/4"	24	14.5	21	12.2	17
1"	27.5	17	24.5	14.5	19
1-1/4"	34	23	31	20.5	23
1-1/2"	35.5	23.5	32.5	21	26
2"	39.5	26.5	36	23.5	31.5
2-1/2"	39	27	35	23.5	32
3"	44	30	40	26	36

## FEATURE


- MODEL NO.: HY-CSP
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD: No.2158, Binhai 1<sup>st</sup> Road, Economic and Technical Development Zone, Longwan District, Wenzhou City, Zhejiang Province, China. Zip Code: 325025 Email: sales@huiyivalve.com  
 Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## FEMALE THREAD REDUCING TEE

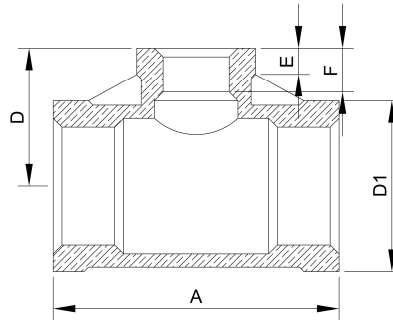

### DIMENSION TABLE

SIZE(INCH)	D1(MM)	A(MM)	D(MM)	E(MM)	F(MM)
3/8"×1/8"	20.2	38	19	5.5	
3/8"×1/4"	20.2	40	22	6	
1/2"×1/4"	26.9	44	25	6	
1/2"×3/8"	26.9	48	26	6	
3/4"×1/4"	31.9	48	28	6	
3/4"×3/8"	31.9	52	28	6	
3/4"×1/2"	31.9	58	30	6	9.5
1"×3/8"	39.9	56	32	6	
1"×1/2"	39.9	64	34	6	9.5
1"×3/4"	39.9	68	36	7	11.5
1-1/4"×1/2"	48.9	66	38	6	9.5
1-1/4"×3/4"	48.9	72	40	7	11.5
1-1/4"×1"	48.9	80	42	8	14
1-1/2"×1/2"	55.4	70	41	6	9.5
1-1/2"×3/4"	55.4	76	43	7	11.5
1-1/2"×1/2"	55.4	84	45	8	14
1-1/2"×1-1/4"	55.4	92	47	9	15
2"×1/2"	67.4	70	47	6	9.5
2"×3/4"	67.4	76	49	7	11.5
2"×1"	67.4	84	51	8	14
2"×1-1/4"	67.4	92	53	9	15
2"×1-1/2"	67.4	98	55	10	17

### FEATURE


- MODEL NO.: HY-CFTT
- MATERIAL: SS304, SS316
- SIZE: 1/8" TO 4"
- WORKING PRESSURE: 150LB
- CONNECTION: FEMALE THREAD
- THREAD: NPT, BSPT, BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## MALE FEMALE THREAD ADAPTER

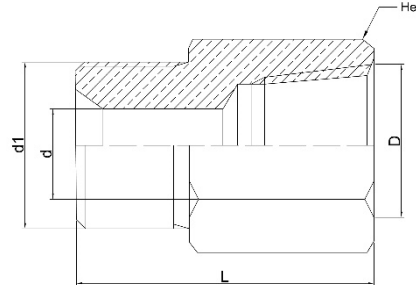

### DIMENSION TABLE

D(mm)	d1(mm)	L(mm)	d(mm)	Hex(mm)
1/8	1/8	27	4.1	14.2
1/4	1/4	27.4	7.1	19
3/8	3/8	32.3	9.6	22.2
1/2	1/2	41.9	11.9	27
3/4	3/4	50.8	15.7	33.3
1	1	56	19.8	41.2
1/8	1/4	27	7.1	14.2
1/4	3/8	27.4	9.6	19
3/8	1/2	32.3	11.9	22.2
1/2	3/4	41.9	15.7	27
3/4	1	50.8	19.8	33.3

### FEATURE


- MODEL NO.: HY-MFTA
- MATERIAL: SS304 , SS316
- SIZE: 1/8" TO 1"
- WORKING PRESSURE: 150LB TO 3000 LB
- CONNECTION: MALE FEMALE THREAD
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: HEX BAR MANUFACTURED



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

## MALE THREAD HOSE BARB ELBOW

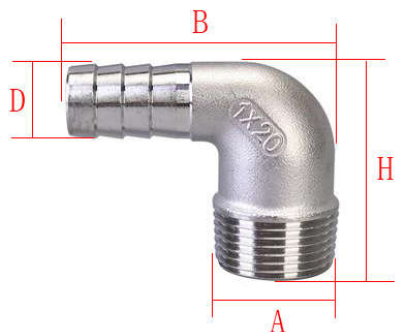

### DIMENSION TABLE

Specification	H(MM)	B(MM)	A(MM)	D(MM)
1/4-8MM	31	34	12	8
1/4-10MM	31	34	12	10
1/4-12MM	31	34	12	12
3/8-8MM	33	42	16	8
3/8-10MM	33	42	16	10
3/8-12MM	34	45	16	12
3/8-15MM	36	45	16	15
3/8-16MM	36	45	16	16
1/2-8MM	34	48	20	8
1/2-10MM	34	48	20	10
1/2-12MM	38	48	20	12
1/2-14MM	40	50	20	14
1/2-15MM	40	50	20	15
1/2-16MM	40	50	20	16
1/2-20MM	43	50	20	20
3/4-20MM	49	63	25	20
3/4-25MM	52	63	25	25
1-20MM	56	71	32	20
1-25MM	61	77	32	25
1-32MM	64	77	32	32
1.2-32MM	69	97	40	32
1.2-40MM	72	98	40	40



# Wenzhou Huiyi Valve Technology Co.,Ltd

ADD:No.2158,Binhai 1<sup>st</sup> Road,Economic and Technical Development Zone,Longwan District,Wenzhou  
City,Zhejiang Province,China. Zip Code: 325025 Email: sales@huiyivalve.com  
Tel: 0086-577-86998027 Fax: 0086-577-86998037 Mobile: 0086-18057736259

---

## **MALE THREAD HOSE BARB ELBOW**

### **FEATURE**

- MODEL NO.: HY-CMTHE90
- MATERIAL: SS304 , SS316
- SIZE: 1/8" TO 2"
- WORKING PRESSURE: 150 LB
- CONNECTION: MALE THREAD – HOSE BARB
- THREAD: NPT,BSPT,BSPP
- MANUFACTURING METHOD: INVESTMENT CASTING