








Specification

Model No.	TGW-LCVT		
Applications	Parking lot, car washing, etc.		
Pots	TCP/IP ports, Power supply ports		
Hardware configurations	Lens (2.8-12mm) : 1pc Waterproof shell 15 inch : 1pc Power supply : 1pc		
Video input	Sensor	1/2.8" CMOS	
	Min illumination	0.1lux color	
	Time of exposure	0-1ms or customize	
	Lens	Variable lens,manual focus, 2.8-12mm	
Video compress	Compress standard	H264	
	Compress bit rate	512-5000kbps	
	Dual-stream	Main:1080P/720P/D1(704*576)/CIF(352*288)/640*360 Sub:D1(704*576),CIF(352*288),640*360	
	Frame rate	1-25fps,default 25fps	
Interface	Power supply	12V/2A,support 9-15V DC	
	Internet	one RS485	
	TF card	Default8GB SD/TF card,extend capacity to 128G	
	Reset	Reset parameter	
	USB	USB Type A	
	IO interface	one in one out	
	Audio	one in one out	
	Fill light	Support external fill light	

Reliability	Temperature	-20°C ~ +70°C
	IP class	IP66
	Power consumption	<7W
	Power supply	12V-2A
Image ISP	Image set	brightness,contrast,saturability,definition,exposure
	Low-light	Support 
	2D/3D denoise	Support 
	Wide dynamic	Support 

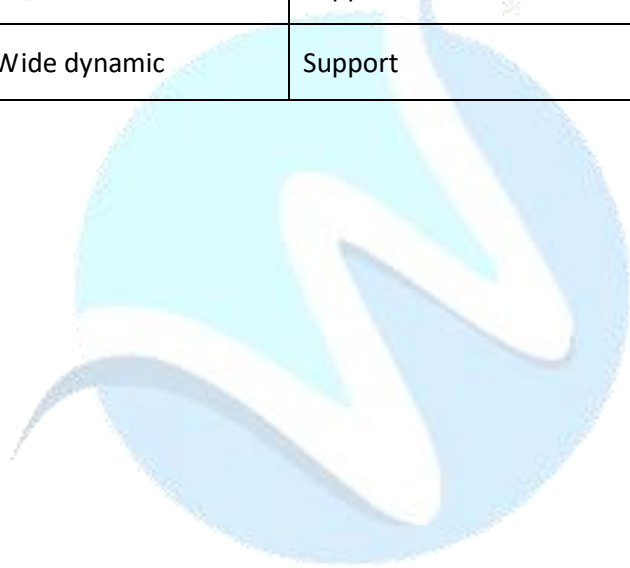

TGW