


BD Serise Specification Sheet


Model	Hinge door	BD-213 BDS-213	BD-216 BDS-216	BD-219 BDS-219
	Sliding door			
Capacity		194L / 6.85cuft	204L / 7.2cuft	214L / 7.56cuft
Net/ Gross Weight		51 / 54	51 / 54	52 / 55
Unit size(mm)		900×530×835 900×511×835	900×530×865 900×511×865	900×530×895 900×511×895
Package size (mm)		945×575×890	945×575×920	945×575×950
Loading Qty (20/40HQ)		48 / 96 / 148	48 / 100 / 124	48 / 100 / 124
Gas	R600a / R290			
Cooling Type	Dynamic cooling (no frost)			
Shelf QTY	4 Chromed Shelves			
Inside Temperature	0 ~ 10 °C (32 ~ 50 °F)			
Power	220V 50/60Hz, 110V 60Hz			
Temperature Control	Digital controller			
Climate Class	N~ST			
Glass Door	Double glazing glass door, with front safety glass, With self-closing door			
LED Light	With one horizontal LED light			
Customized	Handle material and style Alum. / Stainless steel door frame			

BD-213 Drawing (Hinge Door)

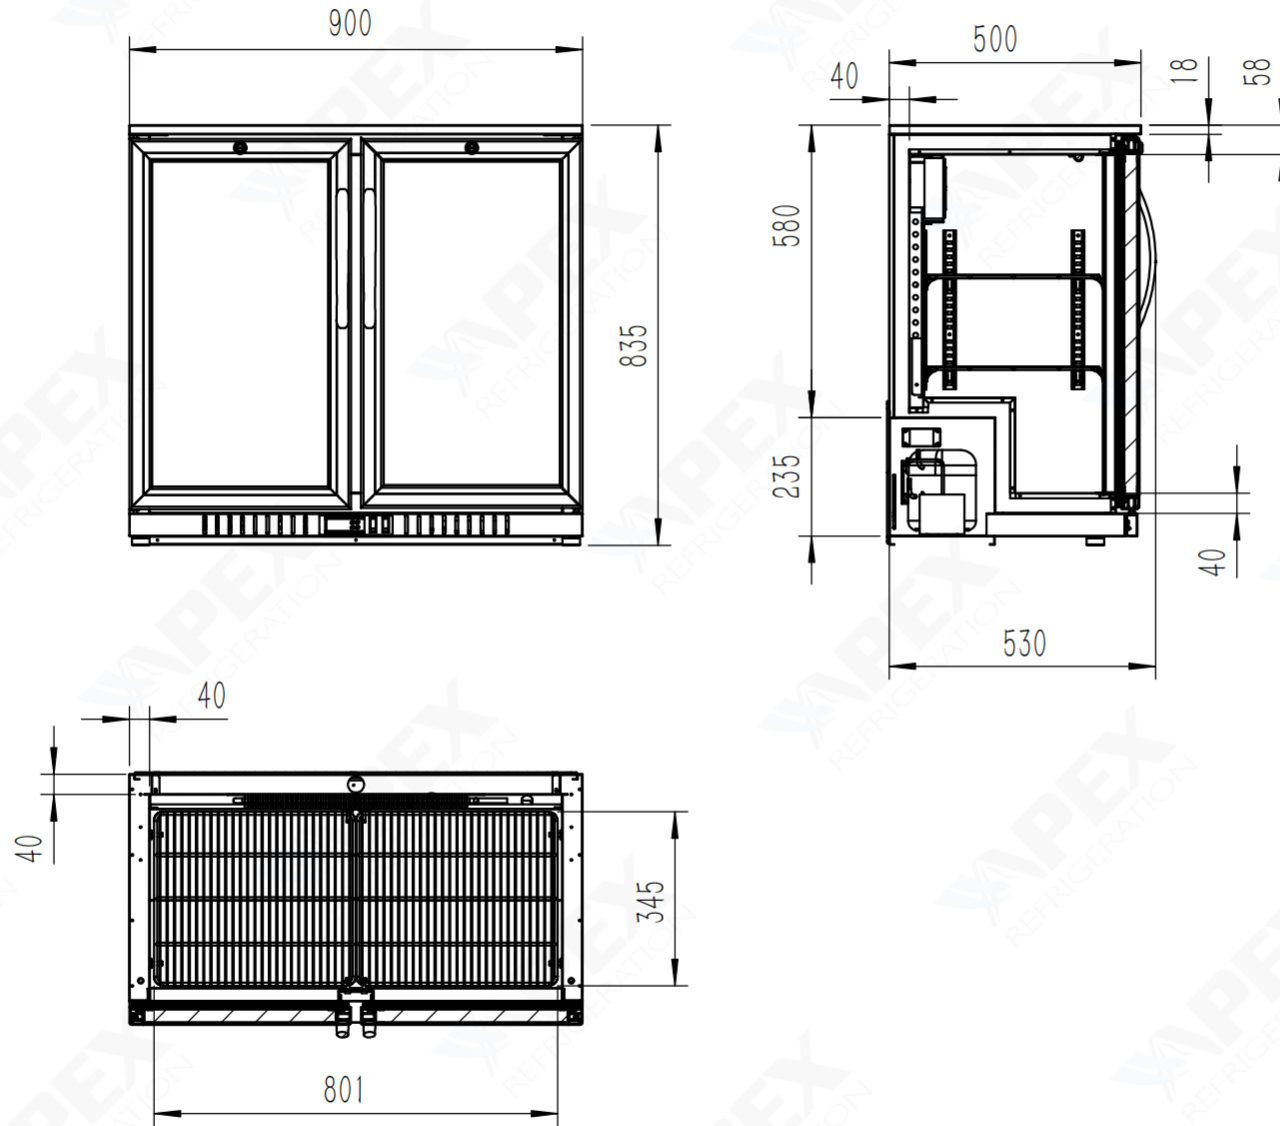


APEX
REFRIGERATION

BD-213 Drawing

Unit Dimension (W×D×H)	900×530×835mm
Package Dimension (W×D×H)	945×575×890mm
	www.apexcool.com info@apexcool.com


BDS-213 Drawing (Sliding Door)

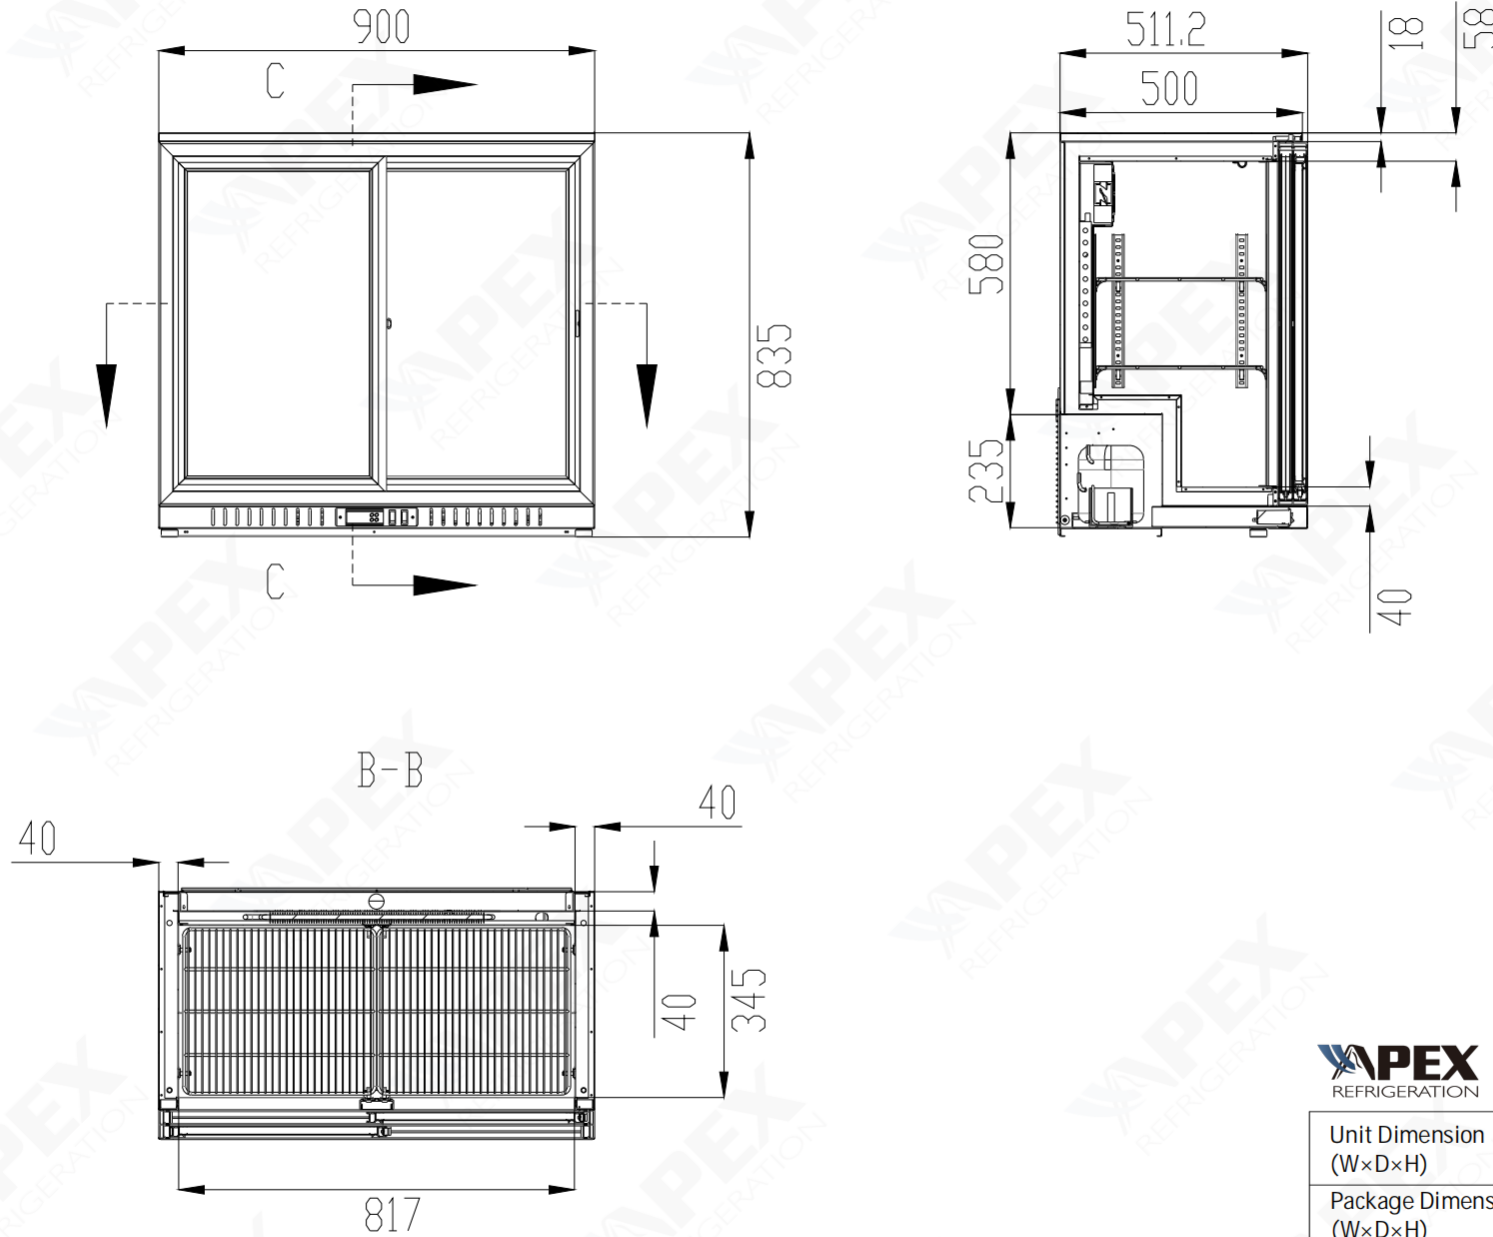

BDS-213 Drawing

Unit Dimension (W×D×H)	900×511×835mm
Package Dimension (W×D×H)	945×575×890mm
	www.apexcool.com info@apexcool.com

BD-216 Drawing (Hinge Door)

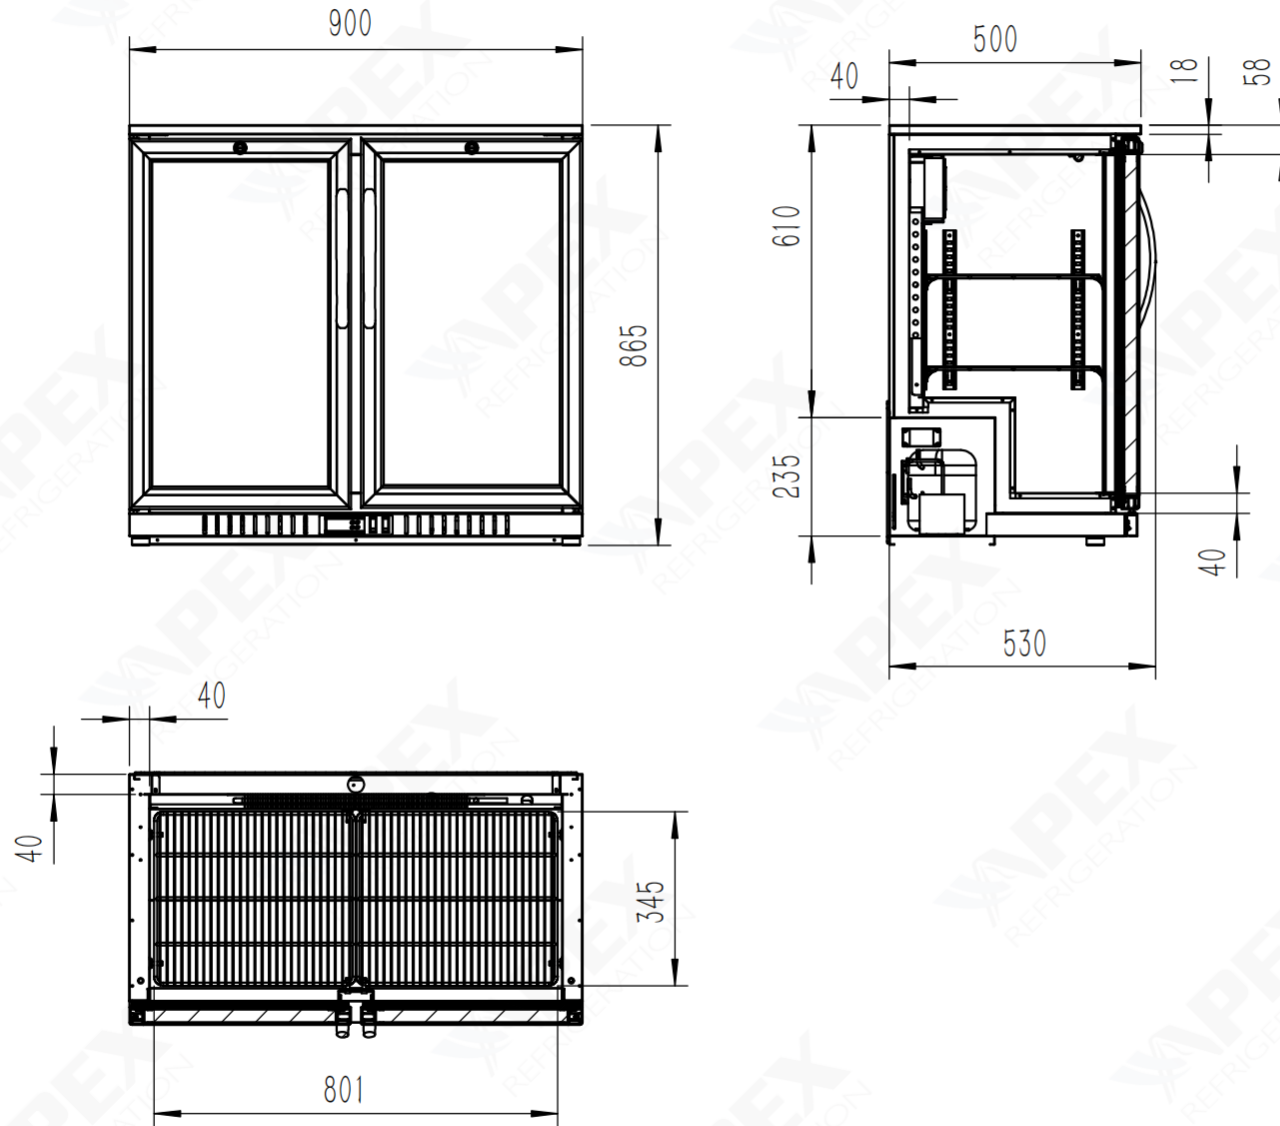


APEX
REFRIGERATION

BD-213 Drawing

Unit Dimension (W×D×H)	900×530×865mm
Package Dimension (W×D×H)	945×575×920mm
	www.apexcool.com info@apexcool.com


BDS-216 Drawing (Sliding Door)

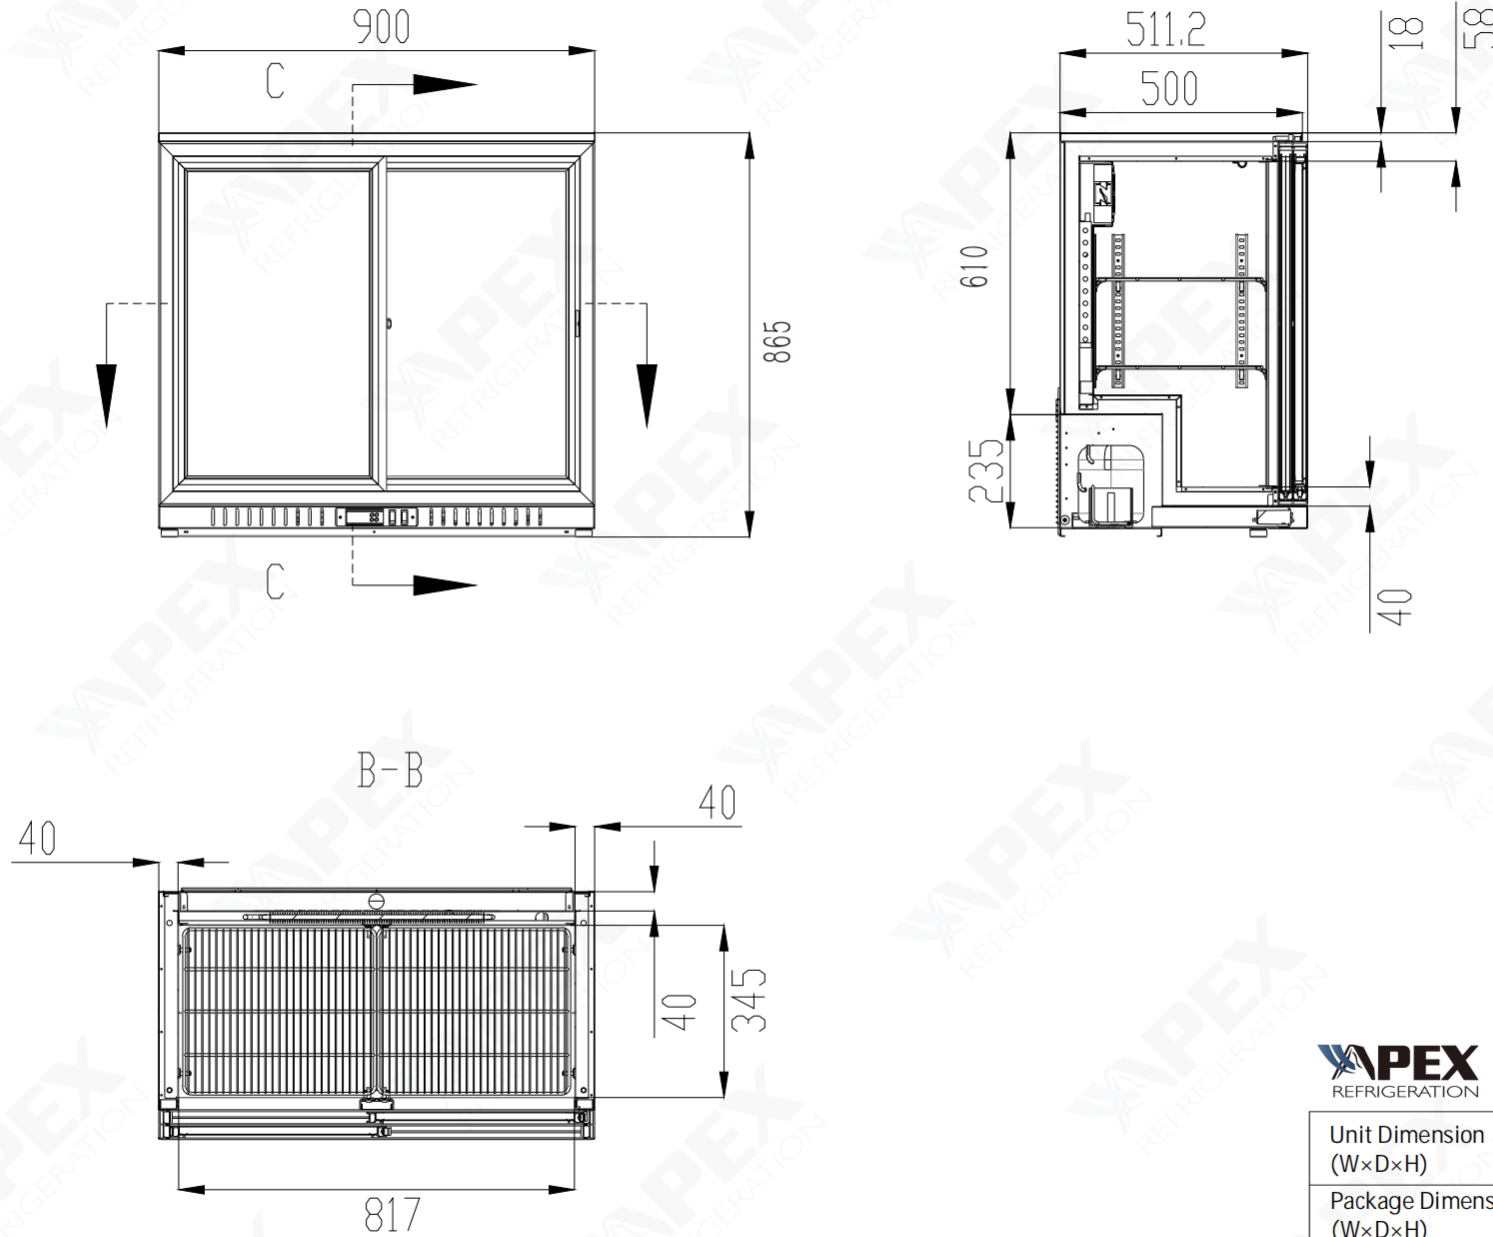

BDS-216 Drawing


Unit Dimension (W×D×H)	900×511×865mm
Package Dimension (W×D×H)	945×575×890mm
	www.apexcool.com info@apexcool.com

BD-219 Drawing (Hinge Door)

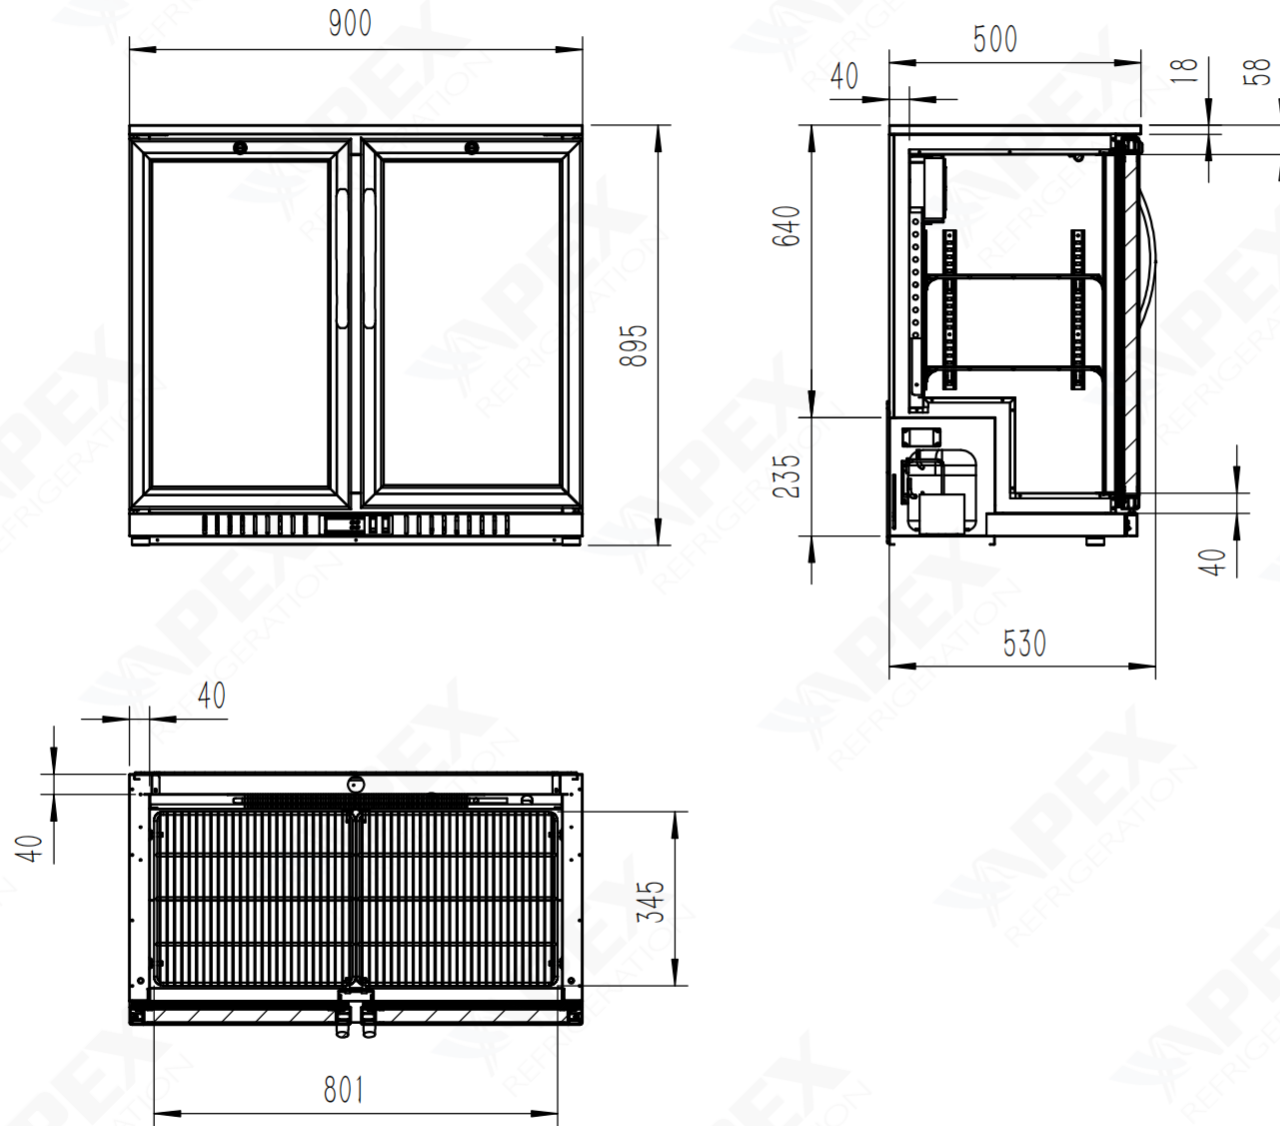


APEX
REFRIGERATION


BD-219 Drawing

Unit Dimension (W×D×H)	900×530×895mm
Package Dimension (W×D×H)	945×575×950mm
	www.apexcool.com info@apexcool.com

BDS-219 Drawing (Sliding Door)

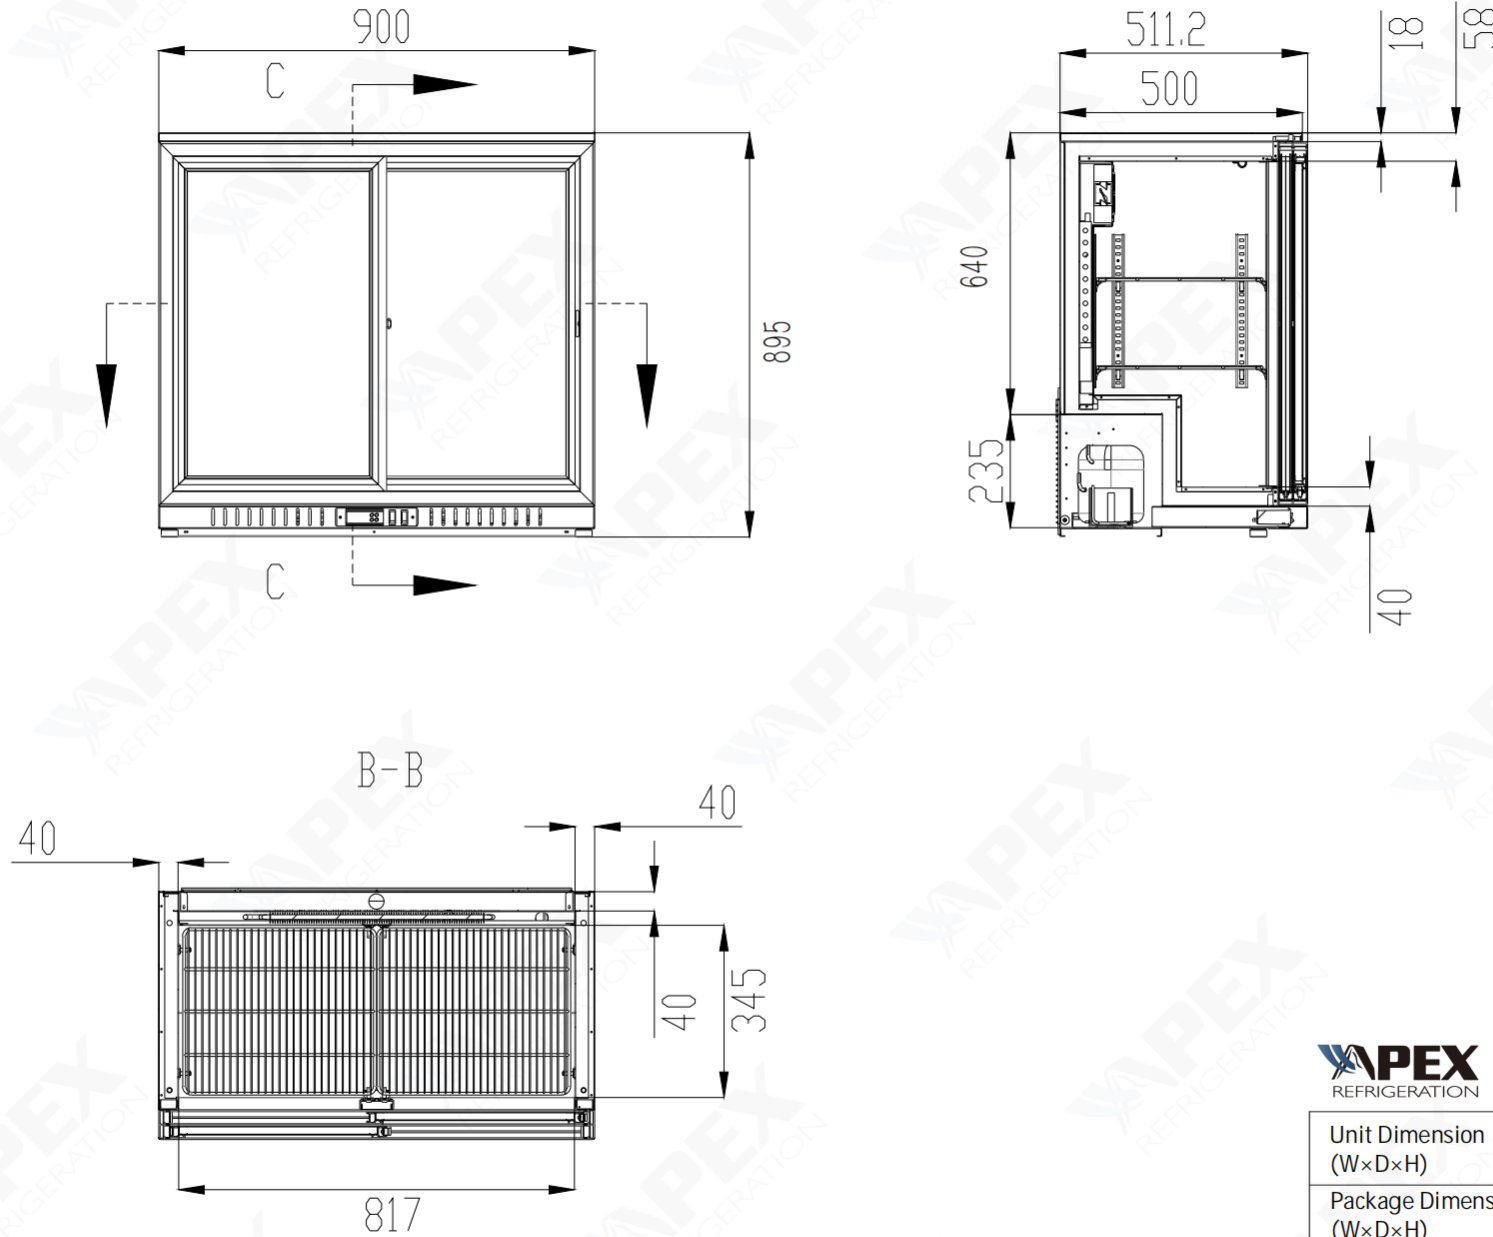

APEX REFRIGERATION BDS-219Drawing

Unit Dimension (W×D×H)	900×511×895mm
Package Dimension (W×D×H)	945×575×950mm
	www.apexcool.com info@apexcool.com

INSTRUCTION MANUAL

BACK BAR COOLER



CONTENTS

● SAFETY PRECAUTIONS	-----	1 ~ 4
● HOW TO USE	-----	4 ~ 5
● CLEANING	-----	-6
● IN CASE OF THE FOLLOWING	-----	-6
● BEFORE REQUESTING SERVICE	-----	-7

Please read these instructions completely before operating the units.

SAFETY PRECAUTIONS

- To ensure proper use, please thoroughly study these SAFETY PRECAUTIONS before operating the Unit.
- The purpose of the safety precautions in this manual is to ensure safe and correct use of the unit to minimize risks that could cause serious damage and injury to you or other persons. The safety precautions are divided into WARNINGS and CAUTIONS. Cases where improper handling of the unit could lead to death or serious injury are listed under the "⚠️WARNING" heading. However, the cases listed under the "⚠️CAUTION" heading could also lead to serious results. To ensure the safety, adhere strictly to both types of safety precautions.
- WARNING: Keep clear of obstruction all ventilation openings in the appliance enclosure or in the structure for building-in.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- Warning: Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- Warning: Do not damage the refrigerant circuit.
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- When disposing of the appliance, do so only at an authorized waste disposal centre. Do not expose to flame.
- Warning: The lamp must not be replaced by the user! If the lamp is damaged, contact the customer helpline for assistance.
- The A-weighted emission sound pressure level is below 70 dB(A)
- The appliance shall be disconnected from its power source during cleaning or maintenance and when replacing parts.
- Warning: Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.
- Warning: To avoid a hazard due to instability of the appliance, it must be fixed in accordance with the instructions.



The symbol is a warning and indicates the refrigerant and insulation blowing gas are flammable.

Warning: Risk of fire / flammable materials.

Warning - Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

Warning - When positioning the appliance, ensure the supply cord is not trapped or damaged.

Warning - Do not locate multiple portable socket-outlets or portable power supplies at the rear of the appliance.


Warning - The refrigerant and insulation blowing gas are flammable. When disposing of the appliance, do so only at an authorized waste disposal centre. Do not expose to flame.



WARNING Improper handling of the unit could lead to death or serious injury.



CAUTION Improper handling of the unit could lead to serious results depending on the circumstances.

- Text set off by the exclamation mark  contains information that should be strictly adhered to.
- After reading the instruction manual, store it in an easily accessible place where the user(s) of this product can easily find it.

◆ PRECAUTIONS FOR INSTALLATION

WARNING



Installation should be performed only by the dealer or a qualified expert. Attempting to install the unit yourself could result in water leakage, refrigerant leakage, electrical shock, or fire.

SAFETY PRECAUTIONS


◆ PRECAUTIONS FOR USE

⚠ WARNING




DONT TAMPER

All repairs, disassembly and modifications should be performed only by qualified technicians. Attempting to perform these yourself could result in a fire, malfunction, and injury.



ELECTRICAL SHOCK HAZARDS

Never splash water directly onto the product or wash with water as short-circuit and electrical leakage could result.



DANGER OF EXPLOSION

Never put flammable or volatile substances into the unit as explosion and fire could result.




PROHIBITED

Do not damage, modify, excessively bend, strain, twist or bundle up the power cord. Also, placing heavy objects the power cord or squeezing it in a tight place could damage it, possible resulting in electrical shock or fire.




PROHIBITED

Use a dedicated wall outlet. Do not use extension cords or convenience receptacles as this could result in electrical shock, overheating and a fire.




FLAMMABLE

Never use flammable spray cans or leave flammable substances near the unit. Sparks from electrical switches could result in explosion and fire.



The cooler is intended for storage and display of beverages for sale. Do not use for other purpose than intended as this could adversely affect items placed in the unit.



beverages



ROTATING DEVICE

Never attempt to insert fingers, sticks, etc. Into the cold air suction outlet as a circulation fan is rotating at high speed inside the outlet. Injury, electrical shock and improper operation could result.



PROHIBITED

For indoor use only. Using the unit in a location exposed to rain could result in electrical leakage and electrical shock.




PROHIBITED

Never place heavy objects or items containing water on top of the unit. Objects could fall down and cause injury and spilled water could deteriorate the insulation of electrical components and result in electrical leakage.




Install the unit in a location where the floor is sturdy enough to support the load of the unit. If the floor is not sturdy enough or installation is incorrectly performed, the unit could tip over and falling shelves and products could cause personal injury.



CAUTION AGAINST EXPLOSION

If you find gas leakage, please don't touch the appliance. Turn it off and open the doors and windows for ventilation. Gas leakage could cause explosion, fire, and fire injury.




SAFETY PRECAUTIONS

! WARNING



Store the unit in a location where it is not exposed to rain. Using a unit that has been exposed to rain could result in electrical leakage and electrical shock.



Keep away from hot air sources
Cooling performance is reduced if the unit is placed near heat sources such as hot plates and stoves and if it is exposed to direct sunlight.




Leave disassembly and disposal of the unit to qualified experts.




Should the unit need temporary storage, make sure not to store the unit in a location where children play and take precautions so that the door cannot be completely closed. This will minimize the risk that a child becomes trapped inside the compartment.

WELL VENTILATED PLACE

Please make sure there is more than 10cm space between UPRIGHT COOLER and the wall. If there is no space, cooling capacity can drop down.



If installation in a damp location is unavoidable, also install an electrical leakage circuit breaker. If no electrical leakage circuit breaker is installed, electrical shock could result.




PROHIBITED

Never hang from the door or climb onto the unit. The unit could tip over or fall and cause material damage or injury.



DISCONNECT POWER CORD PLUG FROM WALL OUTLET

Disconnect the power cord plug from the wall outlet before moving the unit and make sure that the power cord is not damaged during transport. A damaged power cord could result in electrical shock and/or fire.



DONT PINCH FINGERS

Grasp the handle when closing the door. Holding at other positions could result in pinched fingers and injury.




Do not touch


Do not push hand against or apply excessive force to glass surfaces as the glass could break and cause injury.



When disconnecting the power cord plug from the wall outlet, hold at the plug main body close to the outlet. Pulling the cord could cause wire breakage, possibly resulting in overheating and fire.



Make sure that the unit does not tip over or fall when it is moved. A falling unit could cause serious injury.



SAFETY PRECAUTIONS

! WARNING




PROHIBITED

Do not throw items onto the shelves and do not place items totaling more than **25 kg** on each shelf. The shelf could fall down, possibly causing injury.



Be sure to attach and secure shelves correctly. An improperly attached shelf could fall down and cause injury.



HOW TO USE

BEFORE USE

- Remove shipping package, tape, etc, and leave doors open. Ventilate for a while.
- The unit is cleaned before shipment. However, clean the compartment interior after delivery.
- Please insert power supply plug into the wall outlet, single-phase to correct voltage.
- Allow the unit to operate for about 1 hour to cool the compartment before placing items in the cooler.

WAIT 5 MINUTES OR MORE BEFORE RE-STARTING

- Restarting the unit immediately after it has been turned off may cause fuses to blow and activate the circuit-breaker, the compressor may be overloaded, and/or other damage may occur.

TEMPERATURE ADJUSTMENT



The electronic controller has been factory set to cool the beverages to lowest temperature approximately 1-5 Centigrade. Should you wish to alter the temperature set point, please adopt the following procedure.


- **User parameter setting**
In the status of temperature measuring and controlling, press **Set** key for three seconds to enter user parameter setting state, it displays menu St in the digital tube. At this time, press **Set** key to display the corresponding parameter value, and press ▲ or ▼ to adjust the set temperature, and then press **Set** key to return to menu item St.
- **Enter to the administrator menu setting**
In the state of user menu setting, when it displays menu item St in the digital tube, press ▲ to switch to the menu item Po, press **Set** key to display 00, and press ▲ and ▼ to adjust it to 55, then press **Set** key again to return to menu item Po. At this time, press ▲ key to display rd, indicating that it has entered to the administrator parameter setting status. If it doesn't adjust to 55, press **Set** key to return to menu time Po, then press the key ▲, it will exit from user parameter setting status and return to the temperature measuring and control status.
- **Administrator parameter setting**
After enter to the administrator parameter setting, press ▲ and ▼ to select menu items (St、Po、rd.....) ; After select the item, press **Set** key to enter to the current parameter setting, press ▲ and ▼ to adjust parameters, and then press **Set** key to return to the menu item.

HOW TO USE




• Exit from parameter setting

Under the status of parameter setting, press  key or no key operation within 30s, or if Po is not set as 55, press  key when it displays menu item Po (i.e. password input error), it will save the current parameter value and exit from parameter setting.

• Manual defrost

In the status of temperature measuring and controlling, Press  for three seconds to force the open or close of defrost (d1 is not 0, i.e. defrost is not forbidden).

• Parameter recovery

In the status of temperature measuring and controlling, press key  for 10S, display H0 in the digital tube, it will execute one key recovery operation. It could continue to select the parameter recovery items by pressing key , and the selection range is H0~H7, press key  to execute the parameter recovery and then exit, if there is no parameter recovery operation within 30S, it will automatically exit from the mode without recovery of parameters.

Note: During the operation of one key recovery, it needs a stable power supply. If the power supply is not stable, please electrify the controller again then execute one key recovery.

DRAIN TRAY

- Defrosting is performed automatically and drain water is collected in the drain tray.
- Water in the drain tray is evaporated automatically. In humid environments, there will be a large amount of water in the drain tray, so please throw away drain water once a day.

EFFICIENT USE

- To prevent cold air from escaping, open and close the door quickly and keep the door opened for as short a time as possible.
- Please install the unit in a place which is well-ventilated.

SHELF HEIGHT ADJUSTMENT

The shelf height can be adjusted.

Arrange the shelves in accordance with the dimensions of the items to be placed in the cooler.

PLACING ITEMS IN THE SHOWCASE

This showcase employs a forced circulation of cold air system. If circulation of cold air is obstructed, the items will not be adequately refrigerated. Pay attention to the following points:

- Do not let items obstruct the cold air inlet and suction outlet.
- Place items so that they do not protrude from the shelves. The gap between the shelves and the door is used for circulation of cold air.
- Place items evenly on all shelves.
- Commercial refrigeration display cooler.
- This equipment is intended for the storage and display of non-potentially-hazardous bottled or canned products only.

CLIMATE CLASS

- $32^{\circ}\text{C} \pm 2^{\circ}\text{C}$ on appliances of climatic class 0, 1, 2, 3, 4, 6 or 8
- $43^{\circ}\text{C} \pm 2^{\circ}\text{C}$ on appliances of climatic class 5 or 7

CLEANING



To prevent any electrical shock hazards or injury by rotating circulation fan, always disconnect the power cord plug from the wall outlet before cleaning.

1 EXTERIOR AND COOLER COMPARTMENT

Wipe with a soft, dry cloth. If very soiled, wipe with a cloth that has been moistened with a detergent. Then wipe with a cloth that has been dipped in water.



WARNING: Do not splash water directly onto the cooler and do not wash with water. Short-circuit and electrical shock could result.

- Clean the cooler regularly to keep it clean at all times.
- Never use polishing powder, soap powder, benzine, oil or hot water as these will damage the painting and plastic components.



2 CHECKS

To ensure the safety, perform the following checks after cleaning.

- Is the power cord plug firmly inserted into a dedicated wall outlet? Confirm that the plug is not abnormally hot.
- Check the power cord for cracks and damage. Should the slightest irregularity be observed, contact the dealer from whom you purchased this unit or our customer's service.

IN CASE OF THE FOLLOWING

1 POWER FAILURE

Keep opening and closing of the door to a minimum.
Avoid placing new items in the cooler as this will raise the temperature inside the compartment.

2 WHEN NOT USED FOR A LONG PERIOD

Remove all items from the compartment and disconnect the power cord plug from the wall outlet.
Clean the compartment interior and wipe away all water.
To prevent mold formation and bad smell, leave the door open to dry the compartment completely.

3 TRANSPORTATION


Disconnect the power cord plug from the wall outlet.
When moving the cooler, make sure that the feet do not damage the power cord.
Do not let the feet hit against floor steps, thresholds, etc.

4 TEMPORARY STORAGE

Affix a piece of wood, etc. Between the door and main unit to prevent complete closing of the door.
Make sure not to store the unused cooler at a location where children play.
Should a child enter the compartment and the door is closed, the child may not be able to open the door from the inside.

BEFORE REQUESTING SERVICE

Please check the following items if you encounter problems with the unit. If the problem continues after taking the proper remedial actions, disconnect the power cord plug from the wall outlet. Transfer the items stored in the cooler to a box or other container. Then contact the dealer from whom you purchased this unit and be ready to provide information as listed in "REQUIRED INFORMATION" below.



CAUTION To prevent any electrical shock hazards, do not disconnect the power cord plug from the wall outlet with wet hands.

No refrigeration at all	<ul style="list-style-type: none"> ● Is the power supply interrupted? ● Is the power cord plug disconnected from the wall outlet? ● Are the shop's power fuses blown and/or the circuit breaker activated?
Inadequate refrigeration	<ul style="list-style-type: none"> ● Is the temperature setting appropriate? ● Are items obstructing the cold air inlet and suction outlet? ● Are stored items packed too tight? ● Is the door open or is it opened and closed frequently? ● Is the condenser clogged?
Excessive noise	<ul style="list-style-type: none"> ● Are all feet in firm contact with the floor? ● Is the rear panel of the cooler contacting the wall or other objects? ● Are other objects in contact with the cooler?
Condensation on cooler exterior	<ul style="list-style-type: none"> ● Condensation may condense on the exterior and door during hot and humid days or depending on the place of installation. This occurs when the humidity is high and water particles in the air contact cold surfaces. This is normal. wipe away condensation with a dry cloth.

Showcase sometimes stop running when thermostat turns off.

INSTRUCTION MANUAL

REQUIRED INFORMATION

- | | |
|---|--|
| <p>① Nature of malfunction (as accurately as possible)</p> <p>② Product number</p> <p>③ Serial number</p> | <p>④ Customer's name, address, phone number</p> <p>⑤ Year and date of purchase</p> |
|---|--|
- } ON RATING LABEL
ON CARTON