


HB30 High Bay Datasheet

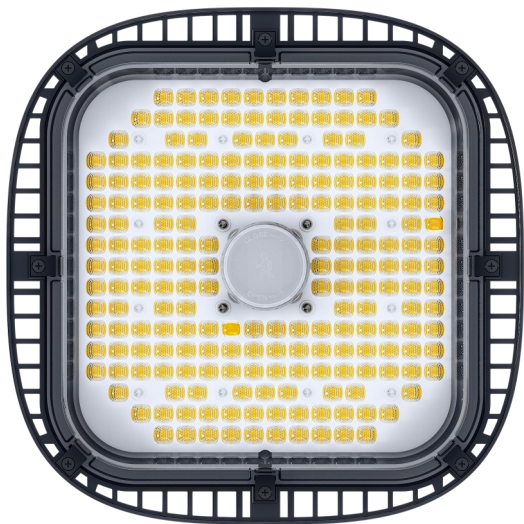

Key Features


- ⇒ **Efficacy:** Up to 210 lm/w
- ⇒ **LED Chip:** SMD5050
- ⇒ **SDCM:** <5
- ⇒ **UGR:** <19 (60° and 90°)
- ⇒ **Beam Angle:** 60° | 90° | 120° | 30°x70°
- ⇒ **Controls:** Microwave & Daylight | Infrared sensor |
0-10V dimming | DALI 2.0
- ⇒ **Power adjustable**
- ⇒ **IP Rating:** IP65
- ⇒ **Installation:** Eye Bolt | Bracket | Pendant rod
- ⇒ **Certifications:** CE, RoHS
- ⇒ **Warranty:** 5 years

Application


Warehouses, libraries, workshops, shopping malls, supermarkets, shops, restaurants, sports centers, cinemas, hospitals, clothing stores, bars and other indoor lighting places.

Photometry


60° PC lens




90° PC lens



120° glass



30°x70° PC lens



HB30 High Bay Datasheet






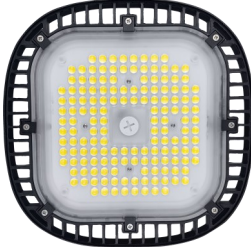
Product Data

Model No.	HB30-100	HB30-150	HB30-200	HB30-240
Power	100W	150W	200W	240W
Lumen Output	21,000 lm	31,500 lm	42,000 lm	50,400 lm
Luminous Efficacy	210 lm/w (190 lm/w optional)			
CCT	3000K 4000K 5000K 5700K 6500K			
CRI & UGR	Ra≥70 (Ra≥80 optional)			
Input Voltage	120 to 277 VAC; 50Hz 60Hz			
Housing Color	Black			
Housing Material	Aluminum, PC, Glass			
Efficiency In	>93%			
Power Factor	PF≥0.95			
Energy Efficiency Class	B			
Operating Temperature	-40°C to +50°C			
Operating Humidity	10% to 90% RH			
Design Lifespan	100,000 hours			
Warranty	5 years			

**Note: 1. The above parameters are all obtained at +25°C and there are errors within the allowable range of relevant standards.
2. This specification book is for reference only. We retains the right to optimize and modify without pre -notification!**

HB30 High Bay Datasheet

Mounting & Accessories (optional)

	<p>Bracket</p> <p>Model No.: UFO-ZJ Steel; Black</p>
	<p>Safety Rope</p> <p>Model No.: UFO-SR Stainless Steel; Silver</p>
	<p>Remote Control</p> <p>Model No.: HD06R Plastic; white</p>
	<p>Microwave & Daylight Sensor</p> <p>Model No.: HD07VR-MH PC; white black; optional Bluetooth</p>
	<p>Infrared Sensor</p> <p>Model No.: HD07VR-PH PC; white; optional Bluetooth</p>
	<p>Connecting Base</p> <p>Model No.: GYZ PC; white</p> <p>Function: When removing the sensor, it can be connected with a sensor socket to prevent oxidation of the interface.</p>

HB30 High Bay Datasheet

Packaging

Model No.	PCS/CTN	N.W	G.W	Volumetric Weight	Carton Size and Volume	20GP(28m³)	40HC/HQ(68m³)
HB30-100	1	1.9 kg	2.5 kg	3.3 kg	L328xW328xH155 mm ≈ 0.017 m³	1,647 pcs	4,000 pcs
HB30-150	1	2.0 kg	2.6 kg	3.3 kg	L328xW328xH155 mm ≈ 0.017 m³	1,647 pcs	4,000 pcs
HB30-200	1	2.7 kg	3.5 kg	4.3 kg	L360xW360xH165 mm ≈ 0.021 m³	1,333 pcs	3,238 pcs
HB30-240	1	2.9 kg	3.6 kg	4.3 kg	L360xW360xH165 mm ≈ 0.021 m³	1,333 pcs	3,238 pcs

Remarks: The weight of the above products is for reference only, and the weight of different configuration products will be different.

Beam Angle Detail




60° | 90° | 30°x70° PC lens




120° Glass

Dimension (unit: mm)

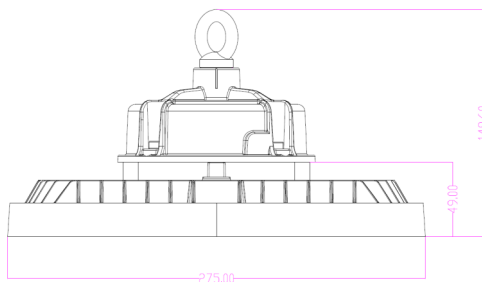

HB30-100 | HB30-150

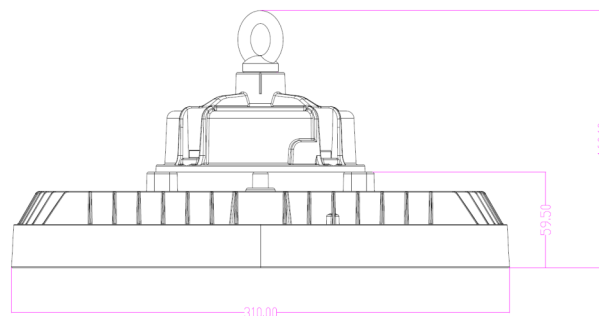

HB30-200 | HB30-240