


迭代直流光伏汇流箱

Iterative DC photovoltaic combiner box

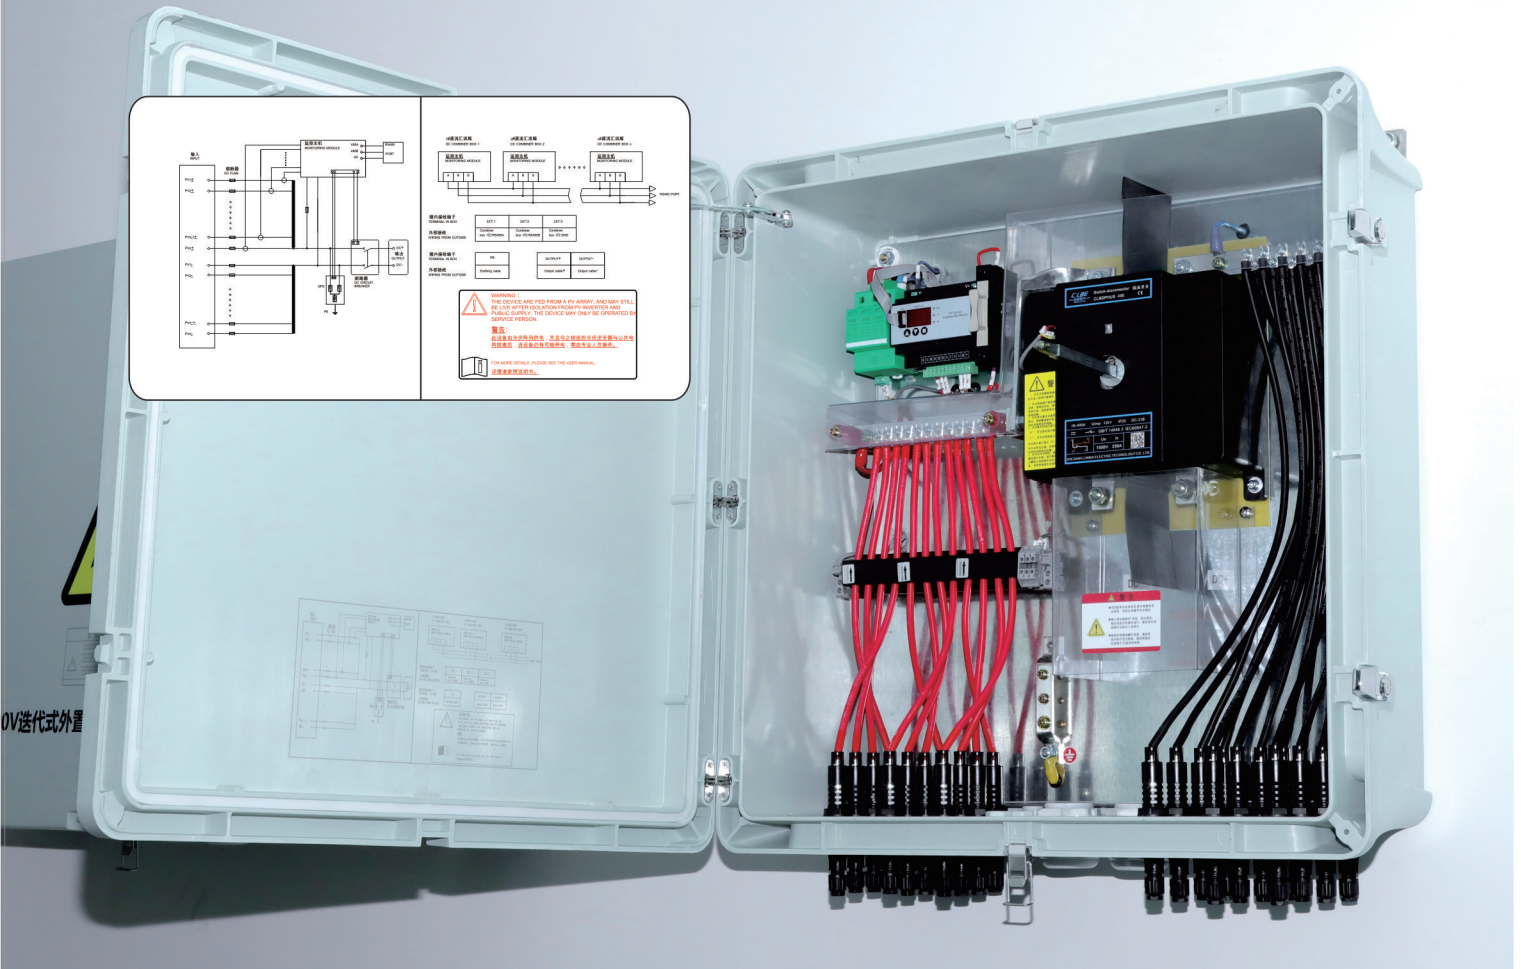

专利设计

PV PANEL FUSE CONNECTOR

光伏面板式保险丝连接器

► SIMPLE TO REPLACE FUSE

保险丝更换简单

► SAVING MAINTENANCE COSTS

节约维护成本



FUSE 1-50A IS OPTIONAL
(保险丝1-50A可选)

RELIABLE
可靠
COST REDUCTION
降本
CONVENIENT
便捷



SCAN THE QR CODE TO SEE MORE
扫一扫查看更多

迭代直流光伏汇流箱，就是改变传统光伏汇流箱里熔断器是一个个紧挨着排列在一起容易产生叠加热效应，另外，熔断器箱内安装占空间也大，进出线还需配防水接头或MC4公母对插接头，通过创新设计，将熔断器安装在箱壁上，解决了传统汇流箱二大问题，节省空间，优化器件排布，提高性能，最主要的还要降低成本，迎来汇流箱新的时代。

The iterative DC photovoltaic combiner box is to change the traditional photovoltaic combiner box that the fuses are arranged next to each other and easily produce superimposed heating effects. In addition, the installation space in the fuse box is also large, and the inlet and outlet lines need to be equipped with waterproof connectors or MC4. Male and female butt connectors, through innovative design, the fuse is installed on the wall of the box, which solves the two major problems of the traditional combiner box, saves space, optimizes the arrangement of components, improves performance, and the most important thing is to reduce costs and usher in convergence. Box new era.

产品特点

产品设计制造严格依据IEC61439-1 IEC61439-2 IEC62109-1 等标准
外箱采用高强度玻璃纤维箱，防护等级可达IP67。

绝缘性能良好安全可靠

采用外置式光伏熔断器，额定电流可达50A（实际情况配置不同）
可在多样的气候环境下使用，温度适用范围广。




安装方式：挂接安装，提供可靠安装挂角。

Product design and manufacturing strictly comply with IEC61439-1, IEC61439-2, IEC62109-1 and other standards.


The outer box adopts high-strength glass fiber box, and the protection level can reach Ip67.

Good insulation performance, safe and reliable Use external photovoltaic fuse, rated current up to 50A (the actual configuration is different) It can be used in a variety of climatic environments and has a wide range of temperature applications.

Installation method: Hook installation, providing reliable installation angle.

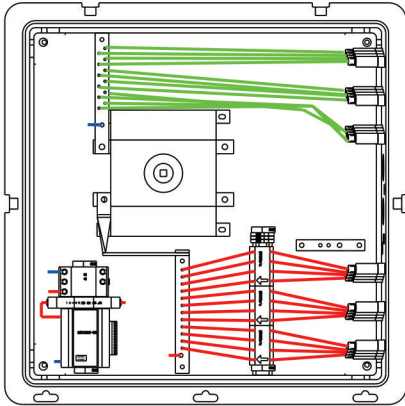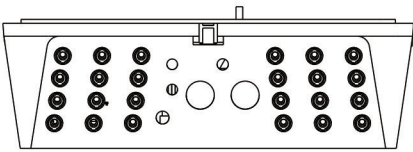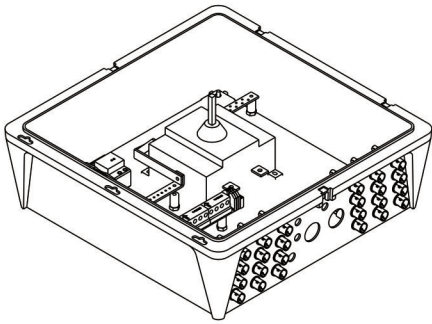

组件清单

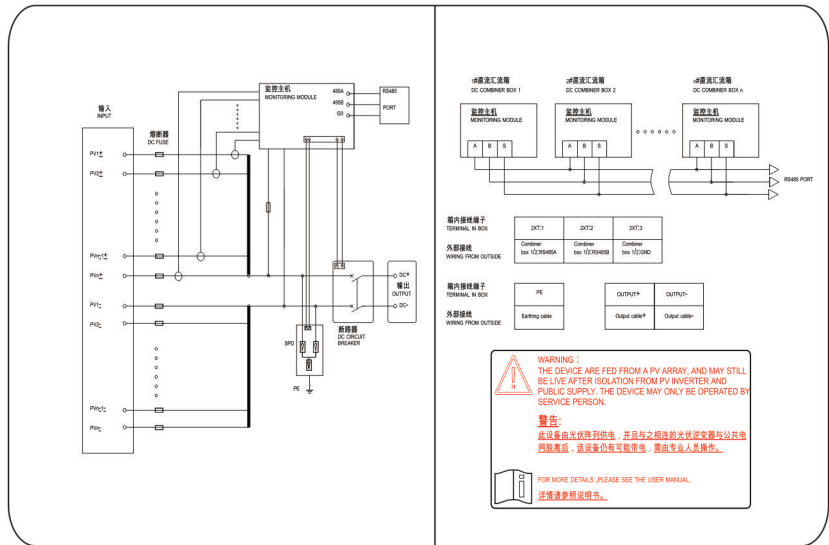

序号 No.	元器件名称 Component	型号及规格 Models and Specifications	单位 Unit	数量 Quantity
1	12路外置式汇流箱 (SMC材质) External combiner box (SMC material)	QST-733733260	台 tower	1
2	隔离开关 Isolating switch	CLBDPHUS-400	台 tower	1
3	外置式熔断器 External fuse	ARDF-50/1500-85 40A	套 Set	24
4	熔断器 Fuse	ARD-32/1500-65	套 Set	1
5	浪涌保护器 Surge protector	LT-40/G1500	台 tower	1
6	智能监控模块 Smart Monitoring Module	IP-15DM	套 Set	1
7	铜排 Copper bar	5X30	套 Set	1
8	其他辅料 Other auxiliary materials		套 Set	1