

S1-W4G-ST

Solis Wi-Fi&Cellular Data Logger

Models: S1-W4G-ST (4 Pin) and S1-W4G-ST (USB)

Description:

A data monitoring device that plugs externally into the bottom of the inverter. The logger relays information from the inverter to the Solis monitoring platform, SolisCloud. It can connect to a local router through Wi-Fi or to a 4G cellular network. If the Wi-Fi network goes down, the logger automatically switches to using the cellular network to limit the loss of data. There are two versions of the logger, USB for S6 hybrid inverter models and 4-pin for all other Solis inverter models.

Features:

- Provides detailed system information for remote troubleshooting
- Comes with both Wi-Fi and 4G cellular communication options
- Automatically switches over to cellular when the Wi-Fi fails
- Relays system fault alarms to the Solis monitoring portal
- Supports up to ten (10) inverters per logger ⁽¹⁾
- 5-year and 10-year data plan options ⁽²⁾
- Works with all Solis inverter models ⁽³⁾
- Allows for remote firmware updates
- Quick, easy, and safe to install
- LED status indicator lights
- 2-year warranty included
- NEMA 4X outdoor rated




S1-W4G-ST (4 Pin)



S1-W4G-ST (USB)

Intelligent Monitoring Solution - S1-W4G-ST

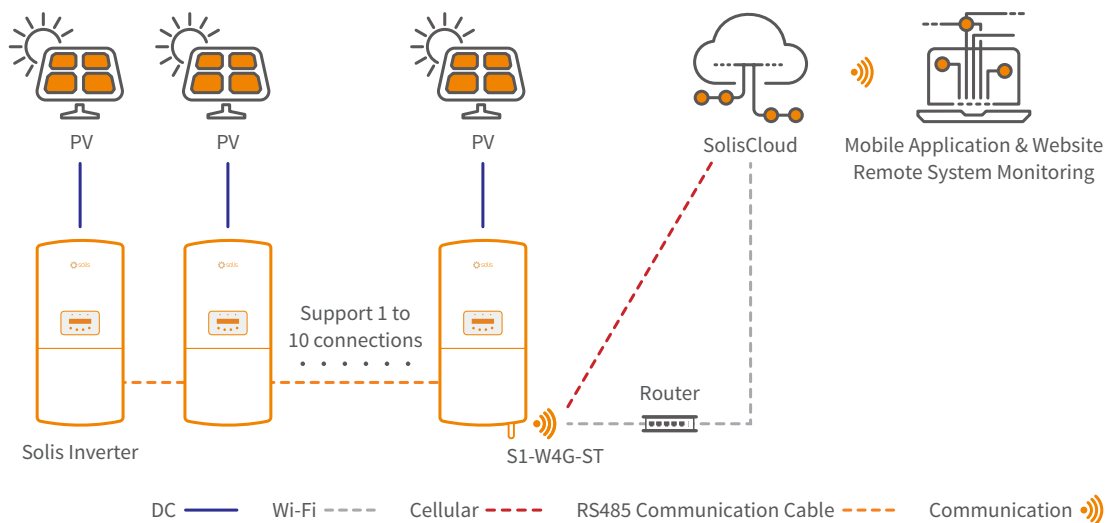

⁽¹⁾ Inverters must first be daisy-chained together with RS485. ⁽²⁾ Data plan cost is included in the price of the logger.

⁽³⁾ For S6-EH1P(3.8-11.4)K-H-US models, S1-W4G-ST-USB must be used.

DATASHEET

S1-W4G-ST

Models	S1-W4G-ST (4 Pin)	S1-W4G-ST (USB)
Communication		
Supported device type	All Solis models except for S6-EH1P(3.8-11.4)K-H-US models	Only S6-EH1P(3.8-11.4)K-H-US models
Number of connected inverters ⁽¹⁾	≤ 10	
Data collection intervals	5 minutes	
Status indicator	3 LED Indicator Lights	
Inverter connection interface	External 4-Pin Port	External USB Port
Wireless communication	WiFi: 802.11b/g/n (2.4G) ⁽²⁾ Verizon, AT&T, T-Mobile, Rogers, & Telus 4G cellular networks (included SIM card) ⁽³⁾	
Near end communication	BLE4.2	
Configuration method	Mobile Application and Website	
Electrical		
Operating voltage	DC 5 V (+ / -5%)	
Operating power consumption	≤ 5 W	
Environment		
Operating ambient temperature range	-22°F to 149°F (-30 to 65°C)	
Operating humidity	5% - 95%, Relative humidity, non-condensing	
Storage temperature	-40°F to 158°F (-40 to 70°C)	
Storage humidity	< 40%	
Max. operation altitude	13,123 ft (4,000 m)	
Protection degree	NEMA 4X	
Mechanical		
Dimensions (L × W × H)	5 × 2 × 1.3 in (128 × 50 × 34 mm)	4.4 × 2 × 1.3 in (113 × 50 × 34 mm)
Installation method	Externally Insert + Twist Lock	Externally Insert + Tab Lock
Weight	0.18 lb (80 g)	0.14 lb (65 g)
Others		
Certification	CE, FCC	

(1) Inverters must first be daisy-chained with RS485. (2) 5 GHz Wi-Fi networks are not supported. (3) A third-party SIM card can be used instead.