




DFAI

1. Installation Recommendation

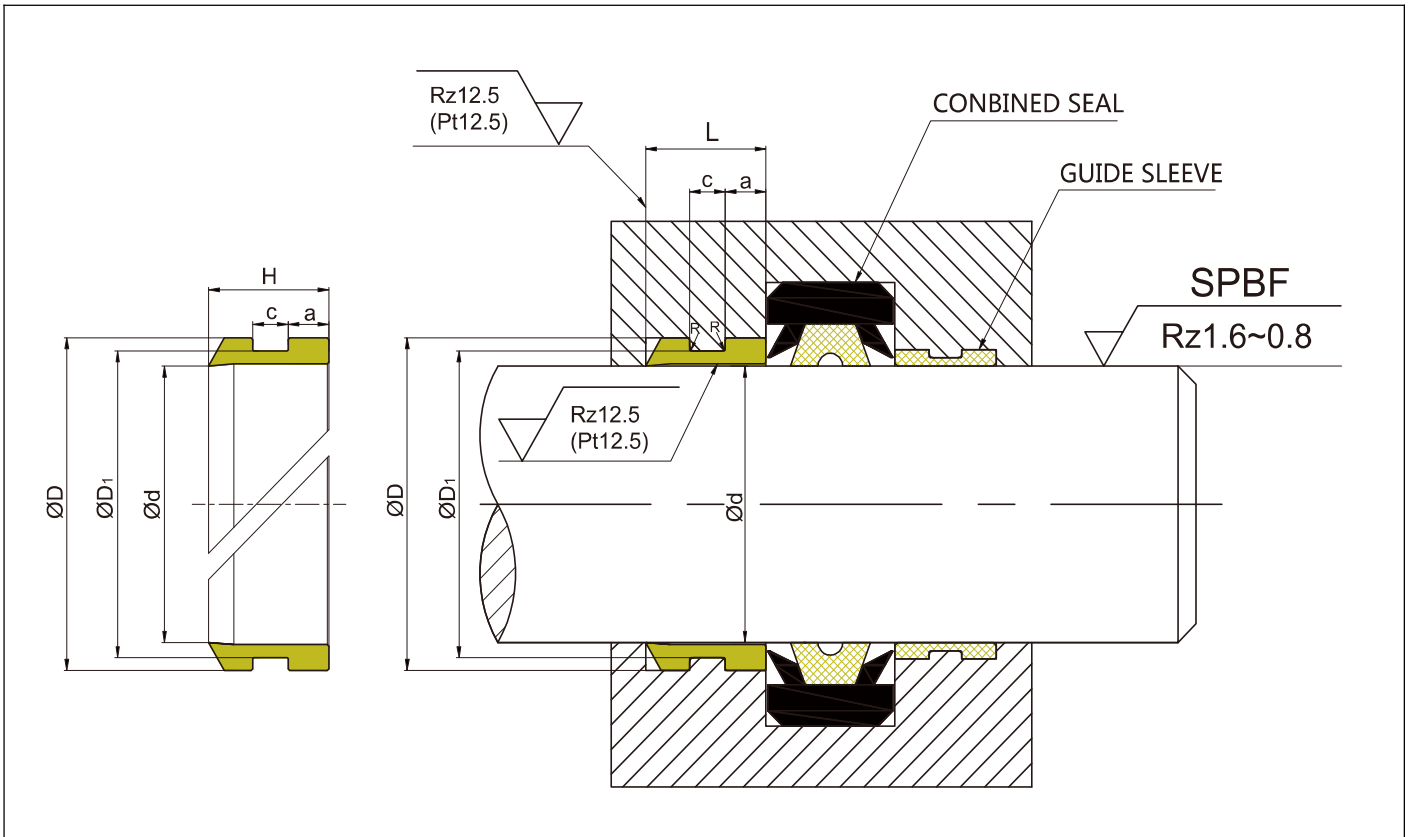

2. Application and properties

Applicable to the guide sleeve of piston rod, can support and guide the piston rod. Excellent vibration reducing performance, installation is simple and secure. The metal and plastic material pairing can prevent the "stagnation" and "seizure" phenomenon.

3. Standard materials

Filled PTFE / PA / POM

4. Working Conditions

Working Conditions				
Diameter Range	Pressure Range	Temperature Range	Speed	Medium
28 - 1000mm	-	-55°C +225°C	3 m/s	general hydraulic oil, emulsion, water



DFAI

5. Installation Dimensions

d	D	D ₁	H	L	c	a	Order No.
28	34	31	19	17	6	6.5	DFAI28*34*19
30	36	33	19	17	6	6.5	DFAI30*36*19
36	42	39	19	17	6	6.5	DFAI36*42*19
40	46	43	19	17	6	6.5	DFAI40*46*19
42	48	45	19	17	6	6.5	DFAI42*48*19
45	51	48	19	17	6	6.5	DFAI45*51*19
50	56	53	19	17	6	6.5	DFAI50*56*19
55	61	58	19	17	6	6.5	DFAI55*61*19
56	62	59	19	17	6	6.5	DFAI56*62*19
60	70	65	24	21	7	8.5	DFAI60*70*24
63	73	68	24	21	7	8.5	DFAI63*73*24
65	75	70	24	21	7	8.5	DFAI65*75*24
70	80	75	24	21	7	8.5	DFAI70*80*24
72	82	77	24	21	7	8.5	DFAI72*82*24
75	85	80	24	21	7	8.5	DFAI75*85*24
80	90	85	24	21	7	8.5	DFAI80*90*24
85	95	90	24	21	7	8.5	DFAI85*95*24
90	100	95	24	21	7	8.5	DFAI90*100*24
95	105	100	24	21	7	8.5	DFAI95*105*24
100	110	105	24	21	7	8.5	DFAI100*110*24
105	115	110	24	21	7	8.5	DFAI105*115*24
110	120	115	24	21	7	8.5	DFAI110*120*24
115	125	120	24	21	7	8.5	DFAI115*125*24
120	130	125	24	21	7	8.5	DFAI120*130*24
125	135	130	24	21	7	8.5	DFAI125*135*24
130	140	135	24	21	7	8.5	DFAI130*140*24
140	150	145	24	21	7	8.5	DFAI140*150*24
150	162	156	35	31	15	10	DFAI150*162*35
160	172	166	35	31	15	10	DFAI160*172*35
165	177	171	35	31	15	10	DFAI165*177*35
170	182	176	35	31	15	10	DFAI170*182*35
180	192	186	35	31	15	10	DFAI180*192*35
190	202	196	35	31	15	10	DFAI190*202*35
200	212	206	35	31	15	10	DFAI200*212*35
220	232	226	35	31	15	10	DFAI220*232*35
225	237	231	35	31	15	10	DFAI225*237*35
240	252	246	35	31	15	10	DFAI240*252*35
250	262	256	35	31	15	10	DFAI250*262*35
260	272	266	35	31	15	10	DFAI260*272*35



DFAI

d	D	D ₁	H	L	c	a	Order No.
280	292	286	35	31	15	10	DFAI280*292*35
290	302	296	35	31	15	10	DFAI290*302*35
300	312	306	35	31	15	10	DFAI300*312*35
320	332	326	35	31	15	10	DFAI320*332*35
350	362	356	35	31	15	10	DFAI350*362*35
360	372	366	35	31	15	10	DFAI360*372*35
380	392	386	35	31	15	10	DFAI380*392*35
400	412	406	35	31	15	10	DFAI400*412*35
450	462	456	35	31	15	10	DFAI450*462*35
500	512	506	35	31	15	10	DFAI500*512*35
600	612	606	35	31	15	10	DFAI600*612*35
630	642	636	35	31	15	10	DFAI630*642*35